6431 & 6439 Bellows



Technology Ltd

- Ideal for hand or foot operation
- Large air volume for ease of operation
- Choice of colours
- Available with plastic base plate for added stability or permanent fixing
- Side or base entry tube outlet






Maximum depression time 30 seconds, for applications requiring a greater period please contact sales to discuss further.

General specifications

Standards/approvals	n/a
Connection method	Tubing 3 mm I/D or 1.5mm I/D (back entry only)
Pressure range	Works with 6871, 6872, 6773, 6753, 6891, 6893, 6861, 6862, 6863, 6864, 6869 – dependent on tube length

Operating temperature range	-10°C to +40°C
Body material	Thermoplastic
Weight	0.08 kg

Reference dimensions mm

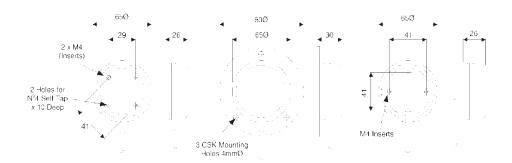

PITCH TECHNOLOGIES

Votre contact HERGA en France **1** 01 34 85 54 68



https://pitch-technologies.fr info@pitch-technologies.fr



6431 & 6439 Bellows



Technology Ltd

Ordering and options Stock models: 6431-AABC-0000 6439-AZZC-0000 - 0000 Model Tube entry 1 Side entry tube 9 Back entry tube Colour option A Black D Red B Grey Green White Tube type Black tubing with 3 mm I/D and 6 mm O/D Clear tubing with 3 mm I/D and 6 mm O/D Black tubing with 1.5 mm I/D and 3 mm O/D Black curly coil with 1.5 mm I/D 3 mm O/D (please select option G from tube length section) No tube required Tube length A 1.5 m E 5 m F 6m B 2 m C 3 m G Curly coil tube (2.4 metre ext.) D 4 m Z None supplied Mounting option C No mounting plate but with M4 inserts fitted Grey plastic plate with mounting holes Grey plastic plate without mounting holes Black plastic plate with mounting holes G Black plastic plate without mounting holes H Chrome plastic plate with mounting holes J Chrome plastic plate without mounting holes Z No mounting plate & no inserts required

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard



PITCH TECHNOLOGIES

Votre contact HERGA en France



