

Pressure Switch VPS100A



- Patented dual-diaphragm / dual contact design
- Excellent shock and vibration resistance
- Miniature size, lightweight, low cost
- Quick response time
- -40...90°C operating temperature
- IP67 protection
- AMP Superseal 2 Pin connector
- Dependable long life (20+ million cycles)



Our durable and ultra-sensitive VPS100A series pressure switch incorporates a patented dual diaphragm / dual contact design offering protection against false actuation due to shock and vibration. Fitted with an AMP Superseal connector for straightforward installation, the switch features a teflon diaphragm, IP67 protection and an extended temperature range.

Specifications

MECHANICAL	
Standard Tolerance	±20%
Switch Type	SPST normally open double-make / double-break
Switching Medium	Air and compatible gases; compatible fluids on "High" side
Mechanical Life	More than 20 million cycles
Maximum Operating Pressure*	4psi: for units with Teflon® diaphragm of 0.5" H ₂ O or less 8psi: for units with Teflon® diaphragm greater than 0.5" H ₂ O
Shock & Vibration	At zero pressure, will not make at 50 g shock, will not make at 10 g, 50 to 2000 Hz vibration
Operating Temp.	-40...90°C

PHYSICAL	
Case Material	Polycarbonate
Porting Options	Two .200" diameter barbed ports (low / high) for use with 1/8" - 3/16" ID tubing
Diaphragm Material	Teflon® (other material options available)
Electrical Connections	AMP Superseal 2 PIN connector
Mounting	2 Mounting holes
Weight	Less than 100 grams
ELECTRICAL	
Current Rating	40mA resistive for life in excess of 20 million cycles
Operating Voltage	AC/DC – 30V or less with resistive load; 120 VAC neon lamp load

Set Point Options

Order-Code	0.5	1.0	1.5	2.0	3.0	4.0	6.0	8.0	10.0	12.0	15.0	20.0	30.0	40.0	50.0
In. H ₂ O	0.1 - 0.5	1.0	1.5	2.0	3.0	4.0	6.0	8.0	10.0	12.0	15.0	20.0	30.0	40.0	50.0
mbar	0.25 - 1.25	2.49	3.73	4.98	7.47	9.96	14.95	19.92	24.91	29.91	37.36	49.76	74.73	99.63	124.59



PITCH TECHNOLOGIES

Votre contact VARIOHM en France
 ☎ 01 34 85 54 68

🌐 <https://pitch-technologies.fr>
 📧 info@pitch-technologies.fr

Subject to change without notice


Pressure Switch VPS100A




As optional accessory, we offer a spacer in order to stack / mount several pressure switches.

Reference Dimensions (mm)

Pressure Switch

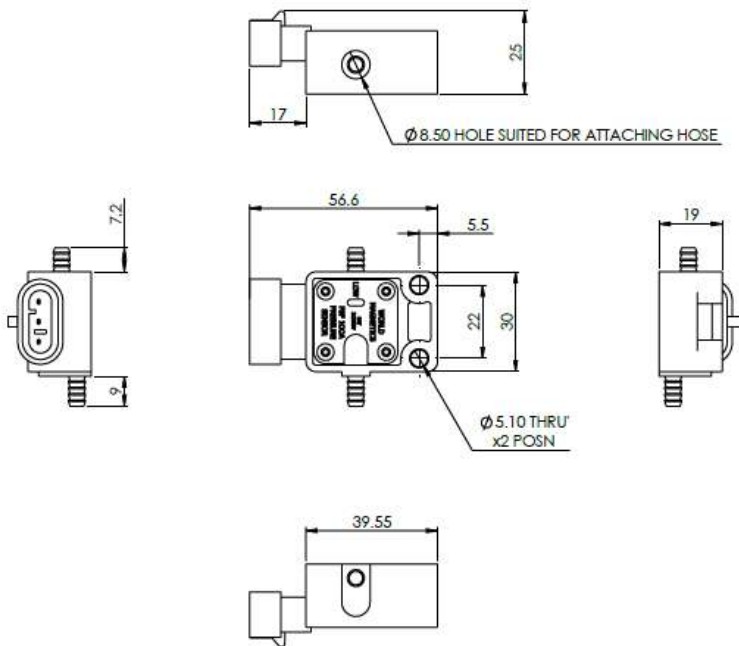

Spacer

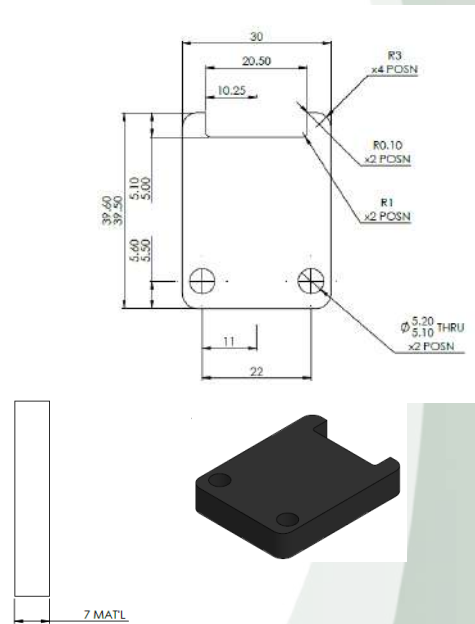

Ordering Information

Order-Code	0.5	1.0	1.5	2.0	3.0	4.0	6.0	8.0	10.0	12.0	15.0	20.0	30.0	40.0	50.0
In. H ₂ O	0.1 - 0.5	1.0	1.5	2.0	3.0	4.0	6.0	8.0	10.0	12.0	15.0	20.0	30.0	40.0	50.0
mbar	0.25 - 1.25	2.49	3.73	4.98	7.47	9.96	14.95	19.92	24.91	29.91	37.36	49.76	74.73	99.63	124.59

For the **sensor**: use Part number **VPS100A-xxT** xx= Order Code pressure

For the **spacer** use order number **24463**

PITCH TECHNOLOGIES

Votre contact VARIOHM en France
 ☎ 01 34 85 54 68

🌐 <https://pitch-technologies.fr>
 📧 info@pitch-technologies.fr

