

- ▶ **NTC Temperature Probe**
- ▶ **Epoxy potting material**
- ▶ **Temperature range -40 to +125°C**
- ▶ **Miniature design with 2,5 mm OD**

Applications

Building management

Heater control

Air conditioning

Features


Cost effective

Stock model

Custom design on request

Specifications		
	Unit	Value
Nominal resistance at +25°C	Ohms	10,000
Resistance tolerance from 0..70°C	°C	+/- 0.2
Beta value 25/85	K	3977
Tolerance on Beta value 25/85	%	+/- 1
Dissipation constant in still air	mW/°C	2
Operating temperature	°C	-40 to +125
Materials		
Leads and insulation	AWG30 white kynar insulated lead wires	
Probe material	Kapton tube, Epoxy potting	

Dimensions in mm

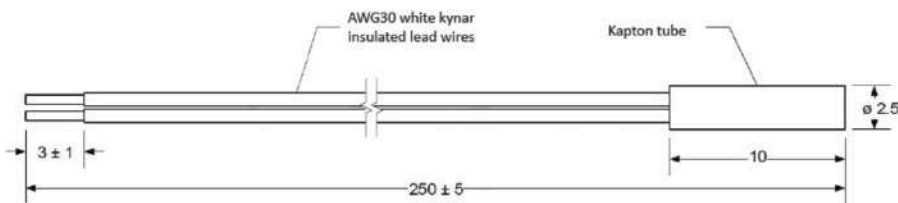

UNITS: [mm]

Ordering information

(Please use the characters in the chart below to construct your product code)

Sample Code ETP - KT - 1 - 2.5 - 24 - EB - 10k3977 - 02



If you require a customized solution for your program contact our sales team.

Resistance vs. Temperature Table for 10K3977 Thermistor

Temp. °C	Ohm
-40	336,052
-39	314,512
-38	294,487
-37	275,863
-36	258,533
-35	242,399
-34	227,373
-33	213,371
-32	200,318
-31	188,144
-30	176,786
-29	166,183
-28	156,280
-27	147,029
-26	138,382
-25	130,296
-24	122,732
-23	115,653
-22	109,025
-21	102,817
-20	97,000
-19	91,547
-18	86,433
-17	81,636
-16	77,134
-15	72,907
-14	68,937
-13	65,206
-12	61,700
-11	58,403
-10	55,301
-9	52,383
-8	49,636
-7	47,049
-6	44,612
-5	42,315
-4	40,150
-3	38,109
-2	36,183
-1	34,366
0	32650
1	31,030
2	29,500

Temp. °C	Ohm
3	28,054
4	26,687
5	25,395
6	24,172
7	23,016
8	21,921
9	20,884
10	19,903
11	18,973
12	18,092
13	17,257
14	16,465
15	15,714
16	15,001
17	14,324
18	13,682
19	13,073
20	12,493
21	11,943
22	11,420
23	10,923
24	10,450
25	10,000
26	9,572.0
27	9,164.7
28	8,777.0
29	8,407.8
30	8,056.1
31	7,721.0
32	7,401.7
33	7,097.3
34	6,807.1
35	6,530.3
36	6,266.3
37	6,014.3
38	5,773.8
39	5,544.3
40	5,325.0
41	5,115.7
42	4,915.6
43	4,724.5
44	4,541.7
45	4,367.1

Temp. °C	Ohm
46	4,200.0
47	4,040.2
48	3,887.4
49	3,741.1
50	3,601.1
51	3,467.1
52	3,338.7
53	3,215.8
54	3,098.0
55	2,985.2
56	2,877.0
57	2,773.3
58	2,673.9
59	2,578.6
60	2,487.1
61	2,399.4
62	2,315.2
63	2,234.4
64	2,156.8
65	2,082.3
66	2,010.8
67	1,942.1
68	1,876.0
69	1,812.6
70	1,751.6
71	1,693.0
72	1,636.6
73	1,582.4
74	1,530.2
75	1,480.1
76	1,431.8
77	1,385.3
78	1,340.6
79	1,297.5
80	1,256.1
81	1,216.1
82	1,177.7
83	1,140.6
84	1,104.9
85	1,070.4
86	1,037.3
87	1,005.3
88	974.4

Temp. °C	Ohm
89	944.7
90	916.0
91	888.3
92	861.5
93	835.7
94	810.8
95	786.8
96	763.6
97	741.2
98	719.5
99	698.6
100	678.4
101	658.9
102	640.0
103	621.8
104	604.1
105	587.1
106	570.6
107	554.6
108	539.2
109	524.3
110	509.8
111	495.8
112	482.3
113	469.2
114	456.5
115	444.2
116	432.3
117	420.8
118	409.6
119	398.8
120	388.3
121	378.2
122	368.3
123	358.8
124	349.5
125	340.6