





| Specifications | |
|-----------------------------|--|
| Standards/approvals | Footswitch: low voltage directive 2014/35/EU, EN 60950 |
| Degree of protection | EN 60529 IPX2 |
| Connection method | 3-core cable (2m long) with stripped cable cores or connector of your choice |
| Electrical rating | 4.5V to 12V DC at 10mA |
| Output voltage range | 6% minimum to 95% maximum of input voltage |
| Output current/type | 100µA / Transistor Sink/Source |
| Operating temperature range | 0°C to +40°C |
| Body material | Thermoplastic |
| Weight | 0.35 kg |
| Average life expectancy | > 1 000 000 operations |

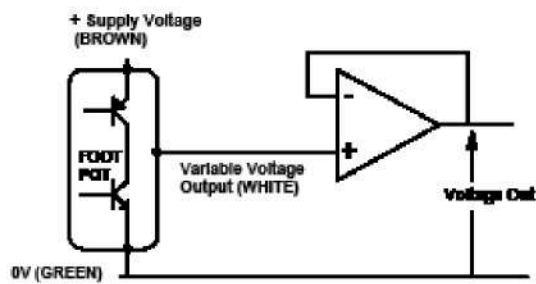

Dimensions

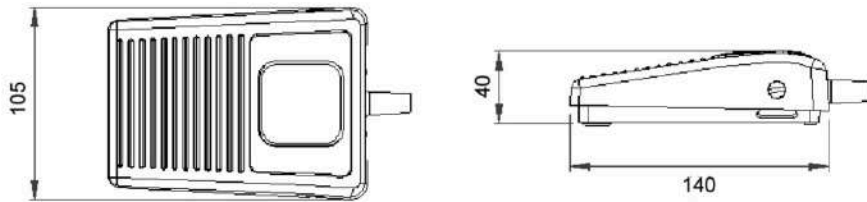

Accessories

| Part Number | Description |
|-------------|-----------------------------|
| 6202-0001 | Single Black RAL 9005 guard |
| 6202-0002 | Single Grey RAL 7035 guard |
| 6202-0003 | Twin Grey RAL 7035 guard |