




- ▶ **Economic/versatile plastic switch designed to reduce operator fatigue**
- ▶ **Pneumatic version available, please refer to Airswitching section for details**
- ▶ **Ideal for repetitive use with office equipment, domestic/medical appliances and general industrial applications**
- ▶ **Increased temperature range of -20 to +80°C**

Specifications	
Standards/approvals	Footswitch: low voltage directive 2014/35/EU, EN 60950 Microswitch: EN 61058-2-1, EN 61058
Degree of protection	EN 60529 IPX7
Connection method	2M of black cable with stripped cable cores
Electrical rating	Max.3A 250V AC/DC
Contact configuration	SPCO
Operating temperature range	-20°C to +80°C
Body material	Thermoplastic
Weight	0.375Kg
Additional information	Customised versions available (Logo's, Guards etc.)

Dimensions

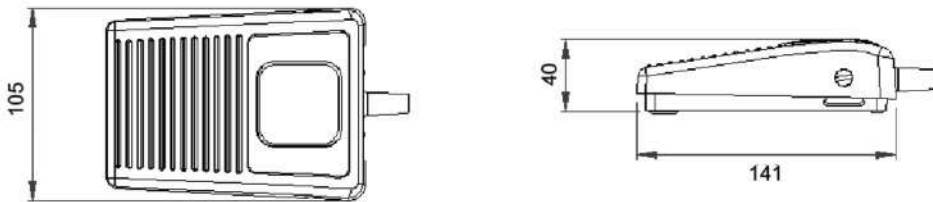




Ordering information

(Please use the characters in the chart below to create your product code)

Sample Code 6219 - A B A B - 000

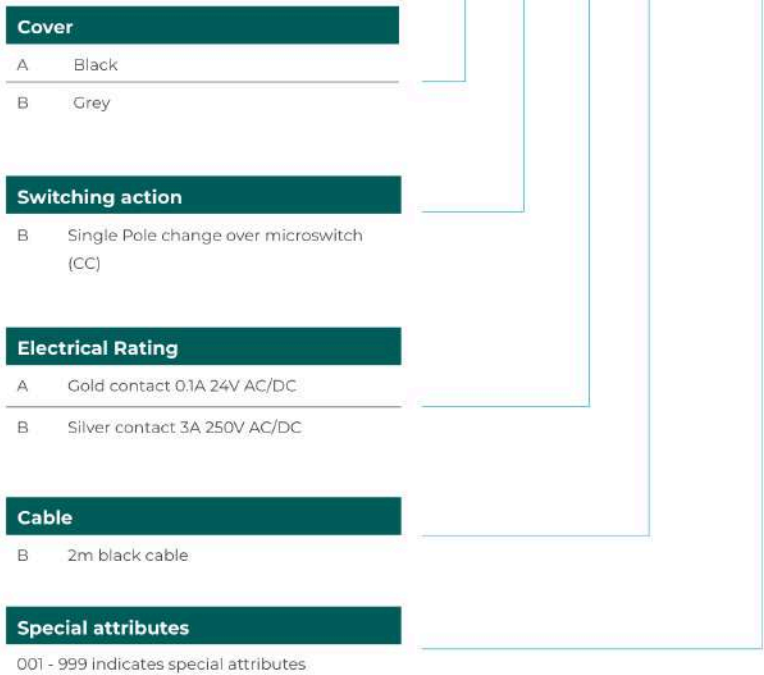

Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard

If you require a customized solution for your program contact our sales team.