



- ▶ Fitted with 2x 6226-BABB-ZZZA-0011 footswitch
- ▶ Fitted with 2x 6241-BBAB-BAZZ-003 puckswitch
- ▶ Grey footswitch with moulded grey modular base system
- ▶ Complete with 2m of cable and Heyco gland
- ▶ Footswitch electrical rating: 1.75A 24V AC/DC
- ▶ Wired normally open


Special dual-pedal version of 6226 series footswitch with dual 6241 puckswitch assembled in modular base system with IPX7 rating

| Specifications | |
|-----------------------------|---|
| Standards/approvals | Footswitch & Puckswitch: UL file reference E353500 ANSI/AAI ES60601-1, A1:2012, C1:2009/(R) 2012 and A2:2010 (R) 2012 CSA CAN/CSA-C22.2 No 60601-1-14 IEC 60601-1 Ed 3.1 (2012) EN 60601-1:2006 & A1:2013 & A12:2014 BS EN 62368-1:2014 & A11:2017 |
| Degree of protection | EN 60529 IPX7 (IPX8 upon request) |
| Connection method | 2m of 6-core cable and Heyco gland |
| Electrical rating | Footswitch - 1.75A 24V AC/DC Puckswitch - 50 mA 24 VDC (operating force <10N) |
| Contact configuration | Normally Open contacts |
| Operating temperature range | +10°C to +50°C |
| Storage temperature range | +10°C to +50°C |
| Body material | Thermoplastic |
| Weight | 1 kg (including cable) |
| Additional information | Footswitch - Customized versions available (logos, cordsets, colours, guards) Base - Lift bars, guards and cable exit options as well as handles, dividers and steel base plate. |





Dimensions


Footswitch



Puckswitch



Modular base

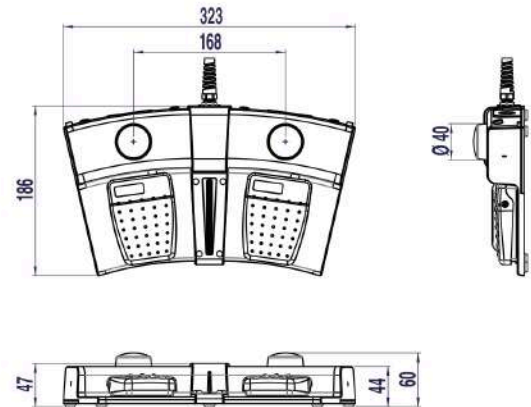

Accessories



- ▶ Bluetooth® switching versions available
- ▶ Lift bars, guards and cable exit options can be specified
- ▶ Handles, dividers and steel base plate options